




# THAI LIN RADIO

since 1975

Дроссель  
герметизированный  
250Vac ENCAPSULATED  
COMMON MODE FILTER



- Horizontal & Vertical Series
- Inductance range : 0.2 ~ 82mH
- Current range : 0.3 ~ 12A
- Dielectric strength : 2000Vrms
- Rated voltage : 250Vac
- Agency approval – VDE: EN 60938-2 (VDE 0565 Teil 2-1)

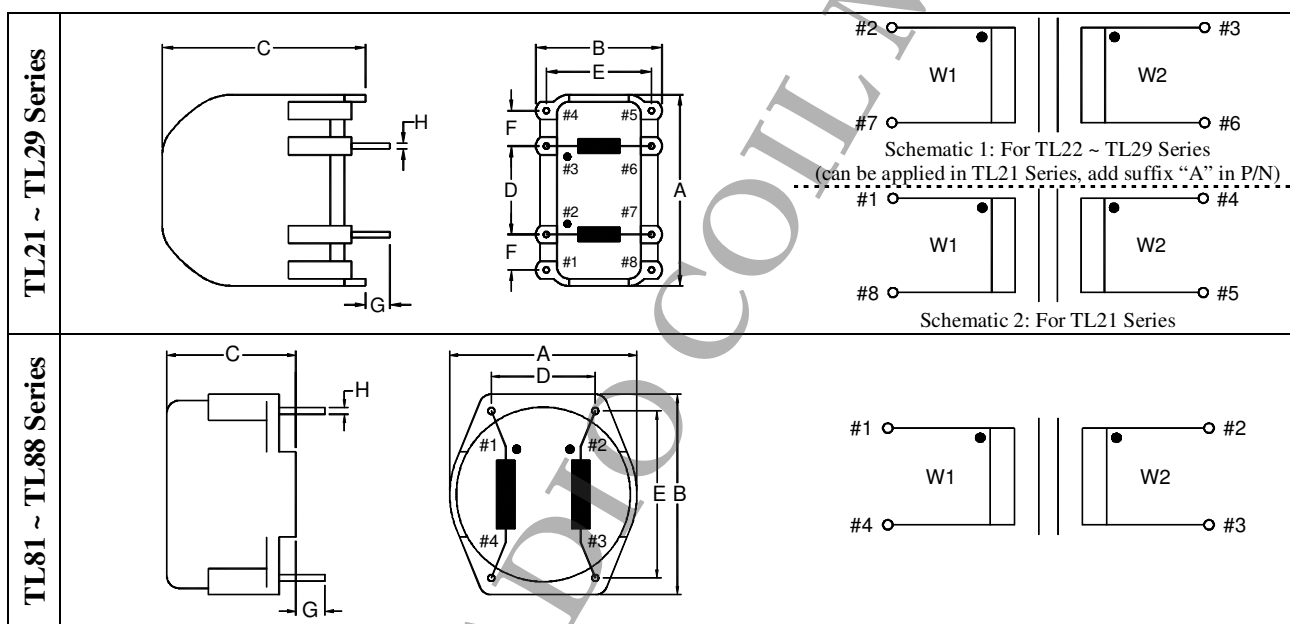

Product Series	Dimension (mm)								Weight (g)
	A	B	C	D	E	F	G	H	
TL21	18.0	12.4	20.0	5.0	10.0	5.0	3.5	Ø0.8	5
TL22	23.0	15.2	25.0	10.0	12.5	5.0	3.5	Ø0.8	13
TL23	27.0	18.0	29.0	12.5	15.0	5.0	3.5	Ø0.8	20
TL24	32.0	18.0	33.5	12.5	15.0	7.5	3.5	Ø0.8	27
TL25	32.0	20.6	36.0	12.5	17.5	7.5	3.5	Ø0.8	32
TL26	37.0	25.5	40.0	15.0	22.5	7.5	3.5	Ø0.8	37
TL27	43.0	28.2	45.0	25.0	25.0	7.5	3.5	Ø0.8	62
TL28	49.0	33.7	52.0	25.0	30.0	10.0	3.5	Ø1.0	110
TL29	63.6	44.0	59.0	25.0	40.0	10.0	3.5	Ø1.0	142
TL81	17.0	18.0	12.5	10.0	15.0	--	3.5	Ø0.8	5
TL82	22.5	24.0	15.5	12.5	20.0	--	3.5	Ø0.8	10
TL83	27.0	28.3	17.5	15.0	25.0	--	3.5	Ø0.8	17
TL84	32.0	33.2	19.5	20.0	30.0	--	3.5	Ø0.8	26
TL84A	32.0	33.2	25.0	20.0	30.0	--	3.5	Ø0.8	34
TL85	37.0	41.5	20.5	20.0	35.0	--	3.5	Ø0.8	40
TL86	42.0	42.0	28.0	25.0	35.0	--	3.5	Ø0.8	58
TL87	47.0	47.0	30.0	30.0	40.0	--	3.5	Ø1.0	87
TL88	52.0	52.0	40.0	35.0	45.0	--	3.5	Ø1.0	133
<b>Tolerance</b>	± 1.0	± 1.0	± 1.0	± 0.5	± 0.5	± 0.5	± 0.5	± 0.1	approx.

Note: Unused pins are omitted for standard parts. Unused pins can be provided on request.


Телефон в Москве +7 (499) 500 94 02;  
29 Телефон в Минске +375 (29) 707 79 46;

E-mail: [belterratrans@gmail.com](mailto:belterratrans@gmail.com)  
Веб-сайт: <http://belterratrans.com/>



# THAI LIN RADIO since 1975

ENCAPSULATED  
COMMON MODE  
FILTER

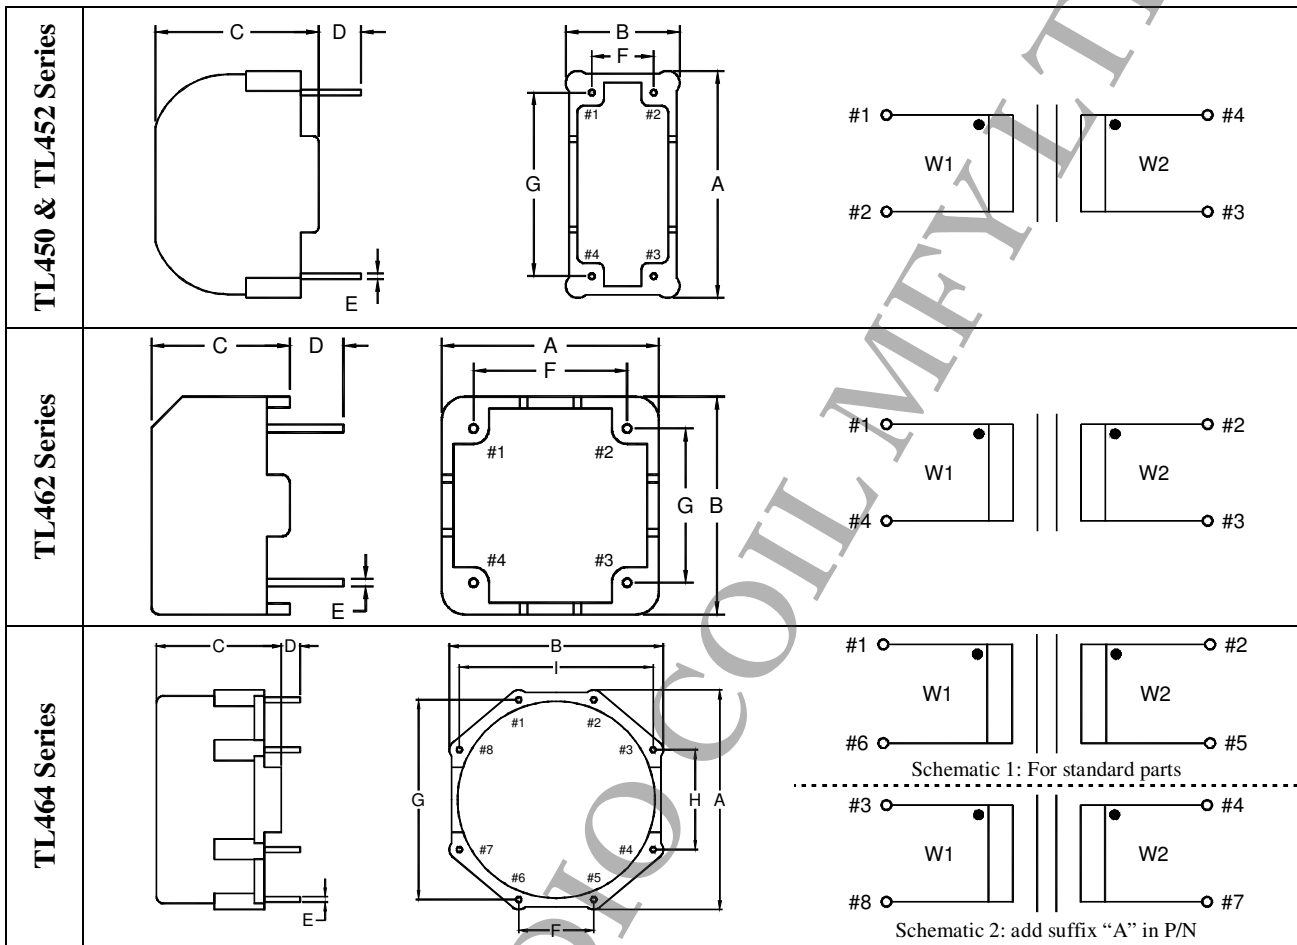

Product Series	Dimension (mm)									Weight (g)
	A	B	C	D	E	F	G	H	I	
TL450	11.0	8.0	9.8	3.5	SQ0.5	5.0	8.75	--	--	1.2
TL452	18.8	9.4	13.5	3.5	SQ0.5	5.1	15.2	--	--	3.4
TL462	14.2	14.2	9.0	3.5	SQ0.5	10.0	10.0	--	--	3.2
TL464	44.0	42.7	25.0	3.5	SQ1.0	15.0	40.0	20.0	38.75	53
<b>Tolerance</b>	±1.0	±1.0	±1.0	±1.0	±0.1	±0.5	±0.5	±0.5	±0.5	approx.

Note: Unused pins are omitted for standard parts. Unused pins can be provided on request.

Part Number	Inductance (mH)	Current (A)	Part Number	Inductance (mH)	Current (A)
TL450-005-402	2 x 4	0.5	TL81-003-473	2 x 47	0.3
TL450-009-202	2 x 2	0.9	TL81-003-393	2 x 39	0.3
TL450-020-501	2 x 0.5	2.0	TL81-004-393	2 x 39	0.4
TL452-003-123	2 x 12	0.3	TL81-004-273	2 x 27	0.4
TL452-006-442	2 x 4.4	0.6	TL81-004-203	2 x 20	0.4
TL452-010-302	2 x 3	1.0	TL81-005-273	2 x 27	0.5
TL452-015-162	2 x 1.6	1.5	TL81-005-153	2 x 15	0.5
TL452-020-112	2 x 1.1	2.0	TL81-006-153	2 x 15	0.6
TL462-003-123	2 x 12	0.3	TL81-006-332	2 x 3.3	0.6
TL462-006-442	2 x 4.4	0.6	TL81-006-102	2 x 1.0	0.6
TL462-010-302	2 x 3	1.0	TL81-007-103	2 x 10	0.7
TL462-015-162	2 x 1.6	1.5	TL81-008-103	2 x 10	0.8
TL462-020-112	2 x 1.1	2.0	TL81-012-682	2 x 6.8	1.2
			TL81-015-432	2 x 4.3	1.5
			TL81-015-332	2 x 3.3	1.5



# THAI LIN RADIO

since 1975

ENCAPSULATED  
COMMON MODE  
FILTER

Part Number	Inductance (mH)	Current (A)	Part Number	Inductance (mH)	Current (A)
TL21-003-473 (#)	2 x 47	0.3	TL81-015-152	2 x 1.5	1.5
TL21-004-393 (#)	2 x 39	0.4	TL81-020-182	2 x 1.8	2.0
TL21-004-273 (#)	2 x 27	0.4	TL81-020-122	2 x 1.2	2.0
TL21-005-273 (#)	2 x 27	0.5	TL81-020-501	2 x 0.5	2.0
TL21-005-153 (#)	2 x 15	0.5	TL81-026-401	2 x 0.4	2.6
TL21-006-153 (#)	2 x 15	0.6	TL81-040-701	2 x 0.7	4.0
TL21-006-152 (#)	2 x 1.5	0.6			
TL21-007-103 (#)	2 x 10	0.7	TL82-003-473	2 x 47	0.3
TL21-008-103 (#)	2 x 10	0.8	TL82-005-473	2 x 47	0.5
TL21-012-682 (#)	2 x 6.8	1.2	TL82-005-393	2 x 39	0.5
TL21-012-301 (#)	2 x 0.3	1.2	TL82-008-273	2 x 27	0.8
TL21-015-432 (#)	2 x 4.3	1.5	TL82-008-153	2 x 15	0.8
TL21-015-332 (#)	2 x 3.3	1.5	TL82-010-153	2 x 15	1.0
TL21-015-201 (#)	2 x 0.2	1.5	TL82-012-103	2 x 10	1.2
TL21-020-182 (#)	2 x 1.8	2.0	TL82-015-682	2 x 6.8	1.5
TL21-020-122 (#)	2 x 1.2	2.0	TL82-020-103	2 x 10	2.0
TL21-026-401 (#)	2 x 0.4	2.6	TL82-020-422	2 x 4.2	2.0
TL21-040-701 (#)	2 x 0.7	4.0	TL82-025-332	2 x 3.3	2.5
			TL82-028-122	2 x 1.2	2.8
TL22-003-473	2 x 47	0.3	TL82-030-202	2 x 2	3.0
TL22-005-563	2 x 56	0.5	TL82-030-401	2 x 0.4	3.0
TL22-005-473	2 x 47	0.5	TL82-040-152	2 x 1.5	4.0
TL22-005-393	2 x 39	0.5			
TL22-008-273	2 x 27	0.8	TL83-005-503	2 x 50	0.5
TL22-008-153	2 x 15	0.8	TL83-006-473	2 x 47	0.6
TL22-010-153	2 x 15	1.0	TL83-006-403	2 x 40	0.6
TL22-010-103	2 x 10	1.0	TL83-006-393	2 x 39	0.6
TL22-010-902	2 x 9	1.0	TL83-006-103	2 x 10	0.6
TL22-012-103	2 x 10	1.2	TL83-006-102	2 x 1.0	0.6
TL22-015-682	2 x 6.8	1.5	TL83-008-473	2 x 47	0.8
TL22-015-362	2 x 3.6	1.5	TL83-008-393	2 x 39	0.8
TL22-020-422	2 x 4.2	2.0	TL83-009-393	2 x 39	0.9
TL22-025-332	2 x 3.3	2.5	TL83-010-503	2 x 50	1.0
TL22-028-122	2 x 1.2	2.8	TL83-010-473	2 x 47	1.0
TL22-030-362	2 x 3.6	3.0	TL83-010-393	2 x 39	1.0
TL22-030-202	2 x 2	3.0	TL83-010-303	2 x 30	1.0
TL22-030-401	2 x 0.4	3.0	TL83-010-273	2 x 27	1.0
TL22-040-152	2 x 1.5	4.0	TL83-010-183	2 x 18	1.0
			TL83-012-503	2 x 50	1.2
TL23-005-273	2 x 27	0.5	TL83-012-303	2 x 30	1.2
TL23-005-123	2 x 12	0.5	TL83-012-153	2 x 15	1.2
TL23-006-473	2 x 47	0.6	TL83-015-103	2 x 10	1.5
TL23-006-393	2 x 39	0.6	TL83-016-103	2 x 10	1.6
TL23-006-422	2 x 4.2	0.6	TL83-020-682	2 x 6.8	2.0
TL23-008-473	2 x 47	0.8	TL83-025-562	2 x 5.6	2.5
TL23-008-393	2 x 39	0.8	TL83-028-332	2 x 3.3	2.8
TL23-009-393	2 x 39	0.9	TL83-030-452	2 x 4.5	3.0
TL23-010-393	2 x 39	1.0	TL83-032-122	2 x 1.2	3.2
TL23-010-303	2 x 30	1.0	TL83-038-401	2 x 0.4	3.8
TL23-010-273	2 x 27	1.0	TL83-040-472	2 x 4.7	4.0
TL23-010-203	2 x 20	1.0	TL83-040-332	2 x 3.3	4.0
TL23-010-183	2 x 18	1.0			
TL23-010-103	2 x 10	1.0	TL84-005-823	2 x 82	0.5
TL23-012-503	2 x 50	1.2	TL84-008-493	2 x 49	0.8
TL23-012-393	2 x 39	1.2	TL84-010-393	2 x 39	1.0
TL23-012-153	2 x 15	1.2	TL84-010-333	2 x 33	1.0
TL23-015-183	2 x 18	1.5	TL84-012-503	2 x 50	1.2
TL23-015-103	2 x 10	1.5	TL84-013-493	2 x 49	1.3
TL23-016-103	2 x 10	1.6	TL84-013-473	2 x 47	1.3
TL23-020-682	2 x 6.8	2.0	TL84-014-393	2 x 39	1.4



# THAI LIN RADIO

since 1975

ENCAPSULATED  
COMMON MODE  
FILTER

Part Number	Inductance (mH)	Current (A)	Part Number	Inductance (mH)	Current (A)
TL23-025-562	2 x 5.6	2.5	TL84-014-273	2 x 27	1.4
TL23-028-332	2 x 3.3	2.8	TL84-015-473	2 x 47	1.5
TL23-030-452	2 x 4.5	3.0	TL84-015-273	2 x 27	1.5
TL23-032-122	2 x 1.2	3.2	TL84-016-183	2 x 18	1.6
TL23-038-401	2 x 0.4	3.8	TL84-018-333	2 x 33	1.8
TL23-040-332	2 x 3.3	4.0	TL84-018-183	2 x 18	1.8
			TL84-018-153	2 x 15	1.8
TL24-005-823	2 x 82	0.5	TL84-020-183	2 x 18	2.0
TL24-008-493	2 x 49	0.8	TL84-020-153	2 x 15	2.0
TL24-010-393	2 x 39	1.0	TL84-020-103	2 x 10	2.0
TL24-010-333	2 x 33	1.0	TL84-020-682	2 x 6.8	2.0
TL24-012-503	2 x 50	1.2	TL84-025-103	2 x 10	2.5
TL24-012-393	2 x 39	1.2	TL84-025-682	2 x 6.8	2.5
TL24-013-493	2 x 49	1.3	TL84-030-682	2 x 6.8	3.0
TL24-013-473	2 x 47	1.3	TL84-030-332	2 x 3.3	3.0
TL24-014-393	2 x 39	1.4	TL84-035-392	2 x 3.9	3.5
TL24-014-273	2 x 27	1.4	TL84-040-332	2 x 3.3	4.0
TL24-015-273	2 x 27	1.5	TL84-040-122	2 x 1.2	4.0
TL24-016-183	2 x 18	1.6	TL84-045-401	2 x 0.4	4.5
TL24-018-153	2 x 15	1.8	TL84-050-182	2 x 1.8	5.0
TL24-020-253	2 x 25	2.0	TL84-060-202	2 x 2	6.0
TL24-020-103	2 x 10	2.0	TL84-060-122	2 x 1.2	6.0
TL24-020-682	2 x 6.8	2.0	TL84-070-401	2 x 0.4	7.0
TL24-025-233	2 x 23	2.5			
TL24-025-682	2 x 6.8	2.5	TL84A-016-473	2 x 47	1.6
TL24-030-332	2 x 3.3	3.0	TL84A-018-393	2 x 39	1.8
TL24-040-332	2 x 3.3	4.0	TL84A-020-273	2 x 27	2.0
TL24-040-122	2 x 1.2	4.0	TL84A-025-153	2 x 15	2.5
TL24-045-401	2 x 0.4	4.5	TL84A-025-103	2 x 10	2.5
TL24-060-202	2 x 2	6.0	TL84A-035-682	2 x 6.8	3.5
TL24-060-122	2 x 1.2	6.0	TL84A-040-702	2 x 7	4.0
			TL84A-040-392	2 x 3.9	4.0
TL25-015-473	2 x 47	1.5	TL84A-060-332	2 x 3.3	6.0
TL25-018-183	2 x 18	1.8	TL84A-060-182	2 x 1.8	6.0
TL25-020-153	2 x 15	2.0			
TL25-025-103	2 x 10	2.5	TL85-017-393	2 x 39	1.7
TL25-030-682	2 x 6.8	3.0	TL85-018-273	2 x 27	1.8
TL25-035-392	2 x 3.9	3.5	TL85-020-273	2 x 27	2.0
TL25-040-802	2 x 8.0	4.0	TL85-020-183	2 x 18	2.0
TL25-040-332	2 x 3.3	4.0	TL85-030-103	2 x 10	3.0
TL25-050-802	2 x 8.0	5.0	TL85-040-682	2 x 6.8	4.0
TL25-050-682	2 x 6.8	5.0	TL85-060-392	2 x 3.9	6.0
TL25-050-182	2 x 1.8	5.0	TL85-080-272	2 x 2.7	8.0
TL25-060-122	2 x 1.2	6.0	TL85-080-132	2 x 1.3	8.0
TL25-070-401	2 x 0.4	7.0	TL85-100-182	2 x 1.8	10.0
TL26-060-272	2 x 2.7	6.0	TL86-080-182	2 x 1.8	8
TL27-080-182	2 x 1.8	8.0	TL87-100-122	2 x 1.2	10
TL28-100-122	2 x 1.2	10	TL88-120-102	2 x 1.0	12
TL29-120-102	2 x 1.0	12	TL464-010-683 (#)	2 x 68	1
			TL464-020-183 (#)	2 x 18	2
			TL464-040-682 (#)	2 x 6.8	4
			TL464-060-392 (#)	2 x 3.9	6
			TL464-080-272 (#)	2 x 2.7	8
			TL464-100-182 (#)	2 x 1.8	10

Note: (#) Items with suffix "A" are available (e.g. TL21-003-473A)