


# THAI LIN RADIO




since 1975

Трансформаторы тока с  
проводами WIRE LEAD  
CURRENT TRANSFORMER

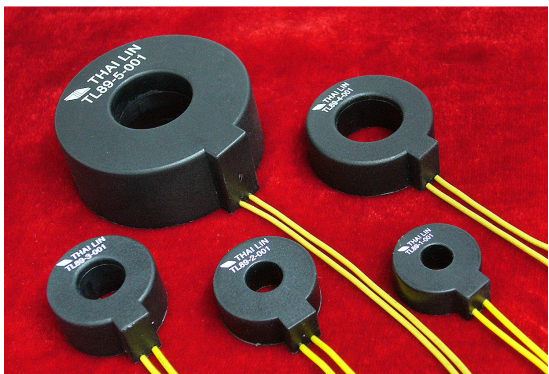

## TL89 Series

- Compact size
- Five different case sizes
- Epoxy encapsulated
- Frequency: 50/60Hz
- Dielectric strength: 1500Vrms
- Ideal for metering, overload current sensing and ground fault detection

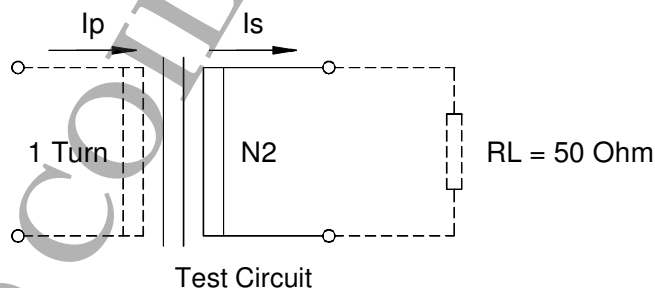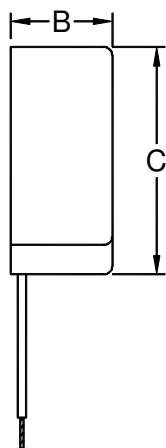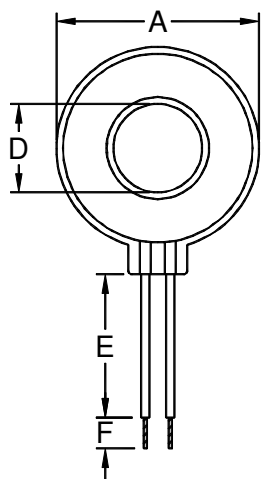

Part Number	Dimension (mm)						Weight (g)
	A	B	C	D	E	F	
TL89-1-001	19.0	8.3	21.7	6.0	100.0	5.0	7
TL89-2-001	22.5	9.3	25.5	7.3	110.0	5.0	10
TL89-3-001	24.5	12.5	27.5	10.0	120.0	5.0	15
TL89-4-001	30.3	11.5	33.5	15.0	135.0	5.0	19
TL89-5-001	48.3	19.5	51.0	18.7	150.0	5.0	103
<b>Tolerance</b>	max.	max.	max.	min.	± 10.0	± 2.0	approx.

Part Number	Input Current (A, nominal)	Input Current (A, max.)	Current Ratio
TL89-1-001	10	20	10A / 10mA
TL89-2-001	15	40	15A / 15mA
TL89-3-001	25	60	25A / 25mA
TL89-4-001	30	70	30A / 30mA
TL89-5-001	150	350	150A / 150mA