

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ30-101EN		
	Product Specification and Approval	Version	4	Page

Предохранитель самовосстанавливающийся (PolySwitch) App Lo Rho FSL с аксиальными выводами Axial Leaded Lo Rho PTC Resettable Fuse: FSL-N Series

1. Summary

- (a) **RoHS Compliant & Halogen Free**
- (b) **Applications: Laptop Computer, Mobile phone battery packs, Rechargeable battery packs, Lithium cell and battery packs**
- (c) **Product Features: Low resistance, Solid state**
- (d) **Operation Current: 1.4~4.5A**
- (e) **Maximum Voltage: 6V**
- (f) **Temperature Range : -40°C to 85°C**

2. Agency Recognition

UL: File No. E211981
C-UL: File No. E211981
TÜV: File No. R50004084

3. Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Maximum Current	Typical Power	Max Time to Trip		Resistance		
	I _H , A	I _T , A	V _{MAX} , VDC	I _{MAX} , A	P _d , W	Current	Time	R _{MIN}	R _{MAX}	R _{1MAX}
						A	Sec	Ohms	Ohms	Ohms
FSL140F-N	1.4	3.6	6	50	1.0	7.0	3.0	0.010	0.020	0.035
FSL180F-N	1.8	5.2	6	50	1.0	9.0	3.0	0.007	0.014	0.026
FSL190F-N	1.9	4.9	6	50	1.0	9.5	3.0	0.006	0.014	0.024
FSL250F-N	2.5	8.0	6	50	1.0	12.5	3.0	0.006	0.012	0.020
FSL270F-N	2.7	8.1	6	50	1.0	13.5	2.0	0.006	0.012	0.018
FSL310F-N	3.1	8.8	6	50	1.0	15.5	3.0	0.004	0.010	0.016
FSL370F-N	3.7	9.0	6	50	1.0	18.5	5.0	0.003	0.008	0.014
FSL450LF-N	4.5	9.5	6	50	1.0	22.5	3.0	0.0025	0.0055	0.010

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.
I_T=Trip current-minimum current at which the device will always trip at 23°C still air.
V_{MAX}=Maximum voltage device can withstand without damage at its rated current.
I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
P_d=Maximum power dissipated from device when in tripped state in 23°C still air environment.
R_{MIN}=Minimum device resistance at 23°C.
R_{MAX}=Maximum device resistance at 23°C.
R_{1MAX} =

- 1) Maximum resistance of device at 23°C measured 1 hour, after tripping for all product series;
- 2) or after REFLOW soldering of 260°C for 20 ~ 40 seconds for all SMD series;
- 3) or after WAVE soldering of 260°C for less than 5 seconds for all DIP series.

Special Note :

- In the event that TWO of the above three conditions were experienced once each, the acceptance criteria will become 1.3 times of R_{1MAX}.
- In the event that ALL of the above three conditions were experienced once each, the acceptance criteria will become 1.5 times of R_{1MAX}.

Physical specifications:

Lead material: 0.1 mm nominal thickness, quarter-hard nickel.

Insulating material: Epoxy.


NOTE : Specification subject to change without notice.

Телефон в Москве +7 (499) 500 94 02;
Телефон в Минске +375 (29) 707 79 46;

E-mail: belterratrans@gmail.com
Веб-сайт: <http://belterratrans.com/>


 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ30-101EN		
	Product Specification and Approval	Version	4	Page

4. Production Dimensions (millimeter)

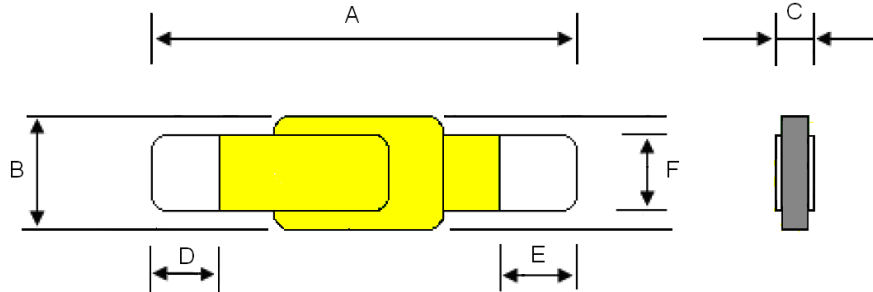

Part Number	A		B		C		D		E		F	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FSL140F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL180F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL190F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL250F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL270F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL310F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL370F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL450LF-N	20.50	21.50	3.50	3.90	0.55	1.10	7.00	8.00	7.00	8.00	2.40	2.60

5. Thermal Derating Curve

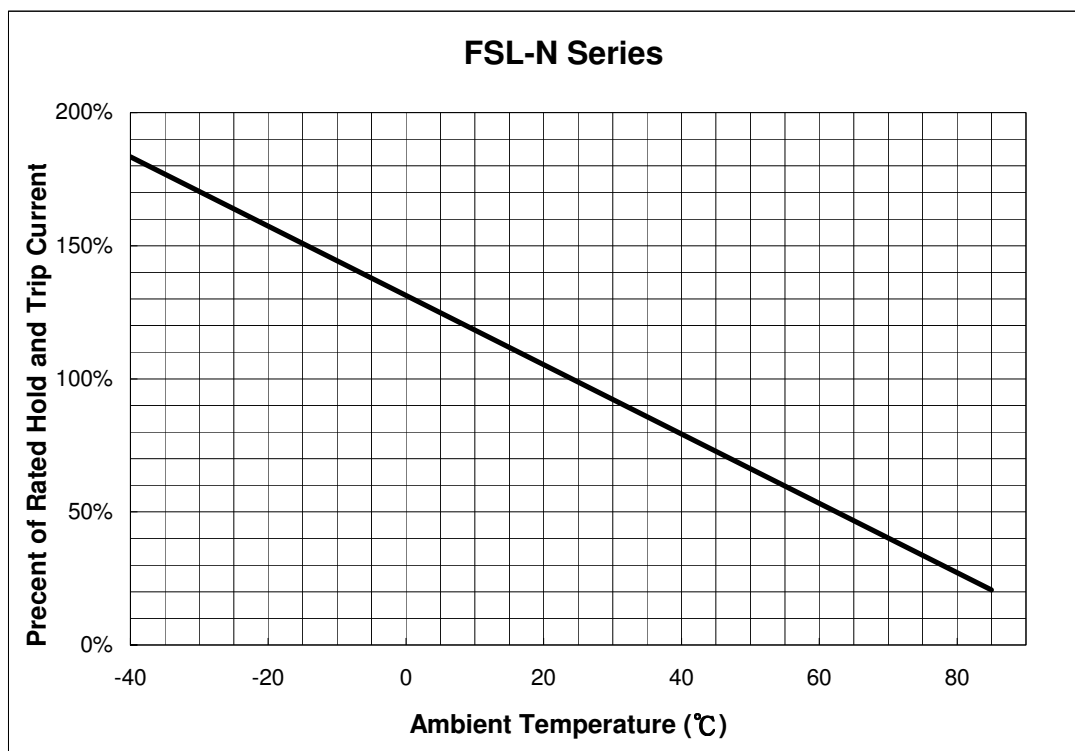


NOTE : Specification subject to change without notice.

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ30-101EN		
	Product Specification and Approval	Version	4	Page

6. Typical Time-To-Trip at 23°C

- A = FSL140F-N
- B = FSL180F-N
- C = FSL190F-N
- D = FSL250F-N/
FSL270F-N
- E = FSL310F-N
- F = FSL370F-N
- G = FSL450LF-N

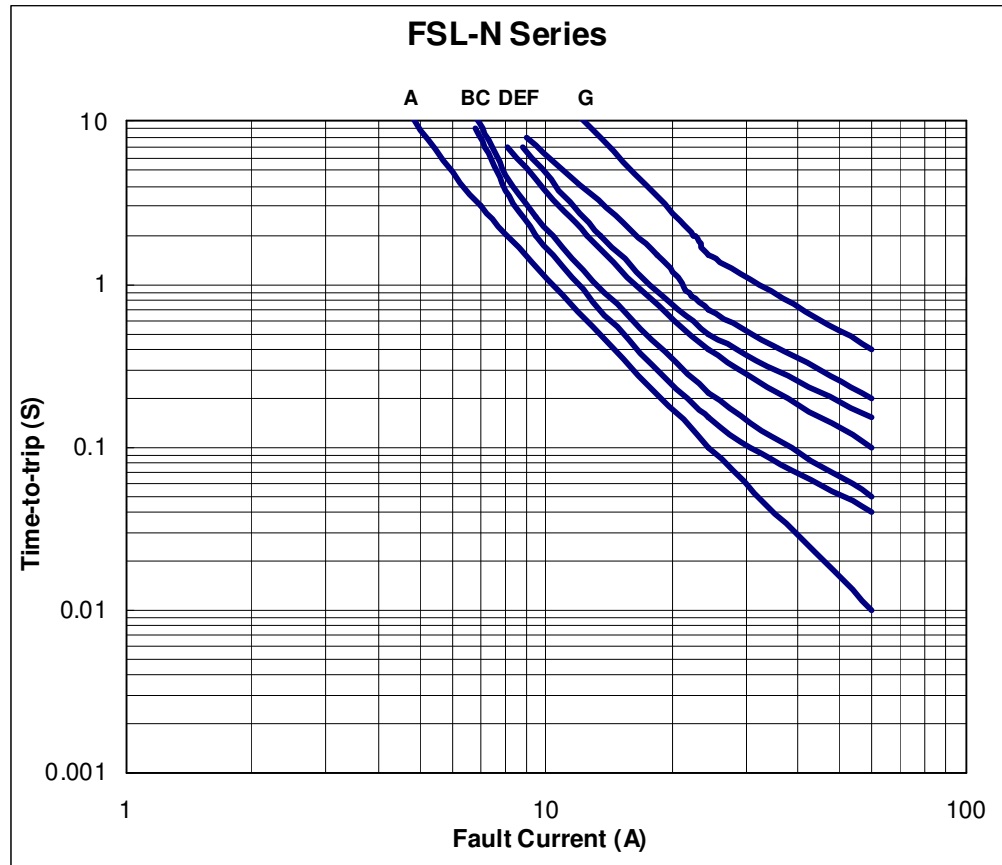


7. Material Specification

Lead material: 0.1 mm nominal thickness, quarter-hard nickel

Insulating material: Epoxy

8. Part Numbering and Marking System

Part Numbering System

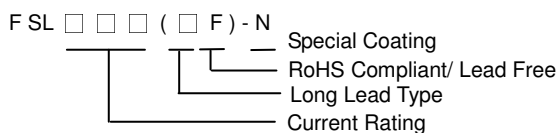

Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

NOTE : Specification subject to change without notice.